


## In-line Filtration

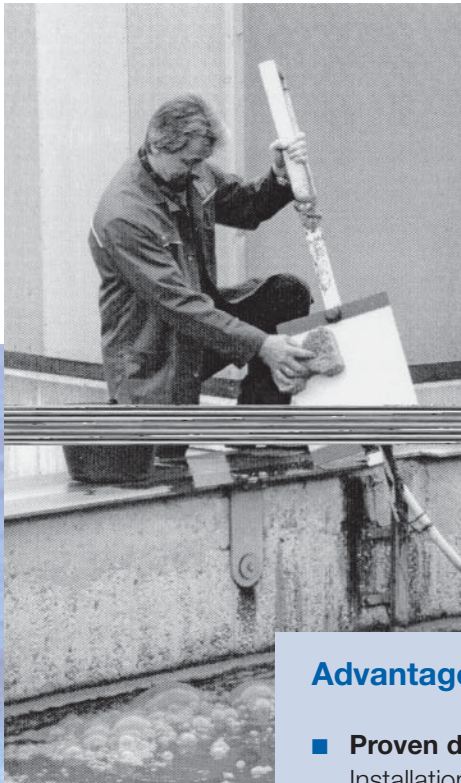

### Advantages

- **Proven design**  
Installations over 3 years
- **Low Maintenance**  
No continuous maintenance necessary
- **Low running costs**  
No tube changes, no chemicals
- **Easy cleaning**  
Normally every 2 to 6 weeks  
Raise it, wipe it, replace it!  
It takes only 1 minute
- **Weight**  
4 kg  
Easy to handle

# In-line Filtration

More than 3 years practical experience

## Technical Data

- Low-maintenance filter 350x450 mm
- Filtrate flow: max. 1000 ml/h adjustable
- Ready mounted on a steel mounting place
- Distance from analyzer: max. 100 m
- Control unit ready mounted in a glass-fibre cabinet
- Membrane pump, manometer, SPS and terminal box included
- Power supply 230 V / 50 Hz, 20 W

## Options

- Special filters for UV and chemical resistance
- Heated sample line with thermostat
- Power supply 230 V



Your local contact: